


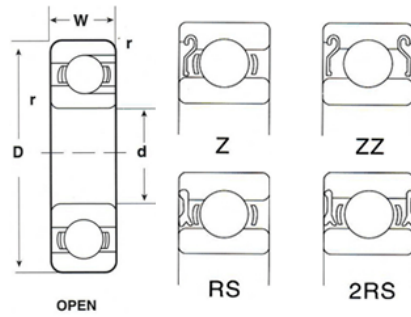

16000系列規格表

型號 Bearing Number	主要尺寸(mm)				基本額定負荷(kgf)		容許回轉數(rpm)		重量 weight (g)
	內徑	外徑	厚度	倒角	動負荷	靜負荷	脂潤滑	油潤滑	
	Bore	Outer diameter	Width	Radius	Dynamic	Static	RS, Z 2-RS, ZZ	開放形 open	
	d	D	W	r	C	C0			
16001	12	28	7	0.3	520	245	27000	32000	24
16002	15	32	8	0.3	570	290	23000	28000	25
16003	17	35	8	0.3	610	335	21000	25000	32
16004	20	42	8	0.3	810	455	17000	21000	50
16005	25	47	8	0.3	855	520	15000	18000	60
16006	30	55	9	0.3	1150	750	13000	15000	85
16007	35	62	9	0.3	1250	905	11000	13000	110
16008	40	68	9	0.3	1280	990	9800	12000	125
16009	45	75	10	0.6	1580	1250	8900	10000	170
16010	50	80	10	0.6	1630	1350	8200	9700	180

R系列規格表

型號 Bearing Number	主要尺寸(inch) (1 inch = 25.4mm)				基本額定負荷(kgf)			重量 weight (g)
	內徑	外徑	厚度		倒角	動負荷	靜負荷	
	Bore	Outer diameter	Width W		Radius	Dynamic	Static	
	d	D						
	英制	英制	開式	雙鐵蓋	r	C	C0	
R1-4	5/64"	1/4"	0.0937"	0.1406"	0.004	29	9	*
R133	3/32"	3/16"	0.0625"	0.0937"	0.004	13	4	*
R1-5	3/32"	5/16"	0.1094"	0.1406"	0.006	44	15	0.454
R144	1/8"	1/4"	0.0937"	0.1094"	0.004	29	10	*
R2-5	1/8"	5/16"	0.1094"	0.1406"	0.004	57	18	0.908
R2-6	1/8"	3/8"	0.1094"	0.1406"	0.006	65	23	0.908
R2	1/8"	3/8"	0.1562"	0.1562"	0.012	65	23	1.362
R2A	1/8"	1/2"	0.1719"	0.1719"	0.012	117	40	3.178
R155	5/32"	5/16"	0.1094"	0.1250"	0.004	35	14	0.454
R156	3/16"	5/16"	0.194"	0.1250"	0.004	40	15	0.454
R166	3/16"	3/8"	0.1250"	0.1250"	0.004	73	27	0.908
R3	3/16"	1/2"	0.1562"	0.1960"	0.012	134	50	2.27
R3A	3/16"	1/2"	0.1960"	0.1960"	0.012	134	50	2.724
R168	1/4"	3/8"	0.1250"	0.1250"	0.004	27	14	0.454
R188	1/4"	1/2"	0.1250"	0.1875"	0.006	85	38	1.82
R4	1/4"	5/8"	0.1960"	0.1960"	0.012	152	63	4.54
R4A	1/4"	3/4"	0.2188"	0.2812"	0.016	238	90	7.72
R6	3/8"	7/8"	0.2188"	0.2812"	0.016	338	143	10.9
R8	1/2"	1-1/8"	0.2500"	0.3125"	0.016	521	243	17.71
R10	5/8"	1-3/8"	0.2812"	0.3438"	0.031	612	333	36.78
R12	3/4"	1-5/8"	0.3125"	0.4375"	0.031	804	462	10.9
R14	7/8"	1-7/8"	0.3750"	0.5000"	0.031	1026	597	71.3
R16	1"	2"	0.3750"	0.5000"	0.031	1026	597	84.9
R188	1-1/8"	2-1/8"	0.3750"	0.5000"	0.031	976	639	89.9
R20	1-1/4"	2-1/4"	0.3750"	0.5000"	0.031	1333	844	94.9
R22	1-3/8"	2-1/2"	0.4375"	0.5625"	0.031	1251	867	105.33
R24	1-1/2"	2-5/8"	0.4375"	0.5626"	0.031	1319	946	140.3