


PHS / POS

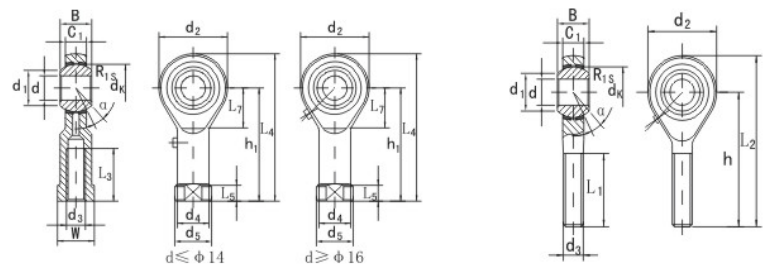

▲ PHS

- » 桿端體帶有左旋或右旋的內螺紋。
- » 外圈球面鑲有青銅襯墊。
- » 桿端體表面鍍鋅，有潤滑油孔或油環。
- » 內圈球面鍍鉻。
- » 若是左旋螺紋，軸承型號須加“L”，例如：PHS8L。

▲ POS

- » 桿端體帶有左旋或右旋的外螺紋。
- » 外圈球面鑲有青銅襯墊。
- » 桿端表面鍍鋅，有潤滑油孔或油環。
- » 內圈球面鍍鉻。
- » 若是左旋螺紋，軸承型號須加“L”，例如POS8L

型号	尺寸mm															負荷KN		重量kg
	d	d3	B	C1	L3	W	d2	d1	h1	L4	L5	d4	d5	dk	a	动	静	
		公差:6H			min										≈	C	C0	
PHS5	5	M5x0.8	8	6	10	9	16	7.7	27	35	4	8.5	11	11.11	13	3.25	5.7	0.016
PHS6	6	M6x1.0	9	6.75	12	11	18	8.96	30	39	5	10	13	12.7	13	4.3	7.2	0.022
PHS8	8	M8x1.25	12	9	16	14	22	10.4	36	47	5	12.5	16	15.875	14	7.2	11.6	0.047
PHS10	10	M10x1.5	14	10.5	20	17	26	12.9	43	56	6.5	15	19	19.05	13	10	14.5	0.077
PHS10B	10	M10x1.25	14	10.5	20	17	26	12.9	43	56	6.5	15	19	19.05	13	10	14.5	0.077
PHS12	12	M12x1.75	16	12	22	19	30	15.4	50	65	6.5	17.5	22	22.225	13	13.4	17	0.1
PHS12B	12	M12x1.25	16	12	22	19	30	15.4	50	65	6.5	17.5	22	22.225	13	13.4	17	0.1
PHS14	14	M14x2.0	19	13.5	25	22	34	16.9	57	74	8	20	25	25.4	16	17	24	0.16
PHS14B	14	M14x1.5	19	13.5	25	22	34	16.9	57	74	8	20	25	25.4	16	17	24	0.16
PHS16	16	M16x2.0	21	15	28	22	40	19.4	64	84	8	22	27	28.575	15	21.6	28.5	0.22
PHS16B	16	M16x1.5	21	15	28	22	40	19.4	64	84	8	22	27	28.575	15	21.6	28.5	0.22
PHS18	18	M18x1.5	23	16.5	32	27	44	21.9	71	93	10	25	31	31.75	15	26	42.5	0.32
PHS20	20	M20x1.5	25	18	33	30	50	24.4	77	102	10	27.5	34	34.925	14	21.5	42.5	0.42
PHS22	22	M22x1.5	28	20	37	32	54	25.8	84	111	12	30	38	38.1	15	38	57	0.54
PHS25	25	M24x2.0	31	22	42	36	60	29.6	94	124	12	33.5	42	42.85	15	47.5	68	0.73
PHS28	28	M27x2.0	35	24	48	41	66	32.3	103	136	14	37.5	46	47.6	15	58	75	0.98
PHS30	30	M30x2.0	37	25	51	41	70	34.8	110	145	15	40	50	50.8	17	64	88	1.1
PHS30-1	30	M27x2.0	37	25	51	41	70	34.8	110	145	15	40	50	50.8	17	64	88	1.1
POS 系列規格表																		

型号	尺寸mm												負荷KN		重量kg
	d	d3	B	C1	L1	d2	d2	h	L2	dk	R1s	a	动	静	
		公差:6g										≈	C	C0	
POS5	5	M5x0.8	8	6	20	7.7	16	33	41	11.11	0.3	13	3.25	5.7	0.013
POS6	6	M6x1.0	9	6.75	22	8.96	18	36	45	12.7	0.3	13	4.3	7.2	0.02
POS8	8	M8x1.25	12	9	25	10.4	22	42	53	15.875	0.3	14	7.2	11.6	0.03
POS10	10	M10x1.5	14	10.5	29	12.9	26	48	61	19.05	0.3	13	10	14.5	0.055
POS12	12	M12x1.75	16	12	33	15.4	30	54	69	22.225	0.3	13	13.4	17	0.085
POS14	14	M14x2.0	19	13.5	36	16.9	34	60	77	25.4	0.3	16	17	24	0.14
POS16	16	M16x2.0	21	15	40	19.4	40	66	86	28.575	0.3	15	21.6	28.5	0.21
POS18	18	M18x1.5	23	16.5	44	21.9	44	72	94	31.75	0.3	15	26	42.5	0.28
POS20	20	M20x1.5	25	18	47	24.4	50	78	103	34.925	0.3	14	31.5	52.5	0.38
POS22	22	M22x1.5	28	20	51	25.8	54	84	111	38.1	0.3	15	38	57	0.48
POS25	25	M24x2.0	31	22	57	29.6	60	94	124	42.85	0.3	15	47.5	68	0.64
POS28	28	M27x2.0	35	24	62	213	66	103	136	47.6	0.3	15	58	75.5	0.96
POS30	30	M30x2.0	37	25	66	34.8	70	110	145	50.8	0.3	17	64	88	1.1