


向心關節軸承 RBL / 球頭杆端關節軸承 RBI

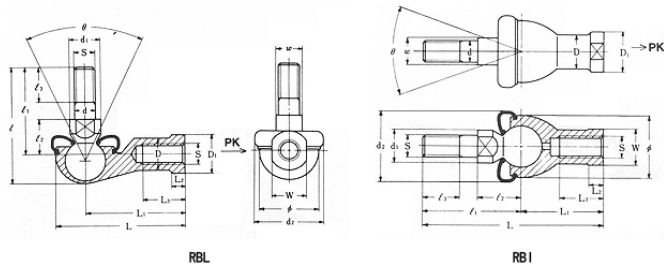

規格列表

RBL 系列規格表

型號 Bearing Number	重量 (g)	JIS 2級 S	D	L	L1	L2	L3	D1	W 0 -0.3	軸徑 d h9	l	l1	l2 ±0.3	l3	d1	w 0 -0.3	球徑 ψ	d2	許容傾斜角 θ	降伏點強度 pk kgf	靜負荷容量徑向 Cs kgf
RBL 5	24	M 5x0.8	9	35	27	4	14	11	9	5	29	21	10	8	9	7	11.112	20	50°	230	940
RBL 6	37	M 6x1.0	10	40	30	5	14	13	11	6	35.5	26	11	11	10	8	12.7	20	50°	360	1230
RBL 8	67	M 8x1.25	12.5	48	36	5	17	16	14	8	42.5	31	14	12	12	10	15.875	24	50°	670	1950
RBL 10	110	M10x1.25	15	57	43	6.5	21	19	17	10	50.5	37	17	15	14	11	19.05	30	50°	1090	2810
RBL 10 B	113	M10x1.5	15	57	43	6.5	21	19	17	10	56.5	43	17	21	14	11	19.05	30	50°	1090	2810
RBL 12	165	M12x1.25	17.5	66	50	6.5	25	22	19	12	57.5	42	19	17	19	17	22.225	32	50°	1670	3820
RBL 12 B	170	M12x1.75	17.5	66	50	6.5	25	22	19	12	64.5	49	19	24	19	17	22.225	32	50°	1670	3820
RBL 14	255	M14x1.5	20	75	57	8	26	25	22	14	73.5	56	21.5	22	19	17	25.4	38	50°	2020	4990
RBL 14 B	260	M14x2.0	20	75	57	8	26	25	22	14	79.5	62	21.5	28	19	17	25.4	38	50°	2020	4990
RBL 16	335	M16x1.5	22	84	64	8	32	27	22	16	79.5	60	23.5	23	22	19	25.4	44	40°	2740	4990
RBL 16 B	340	M16x2.0	22	84	64	8	32	27	22	16	85.5	66	23.5	29	22	19	25.4	44	40°	2740	4990
RBL 18	465	M18x1.5	25	93	71	10	34	31	27	18	90	68	26.5	25	23	20	28.575	45	40°	3400	6310
RBL 20	540	M20x1.5	27.5	99	77	10	35	34	30	20	90	68	27	25	29	24	28.575	50	40°	4680	6310
RBL 22	715	M22x1.5	30	109	84	12	41	37	32	22	95	70	28	26	27	24	31.75	52	32°	4900	7690

RBI 系列規格表

型號 Bearing Number	重量 (g)	JIS 2級 S	D	L	L1	L2	L3	D1	W 0 -0.3	軸徑 d h9	l1	l2 ±0.3	l3	d1	w 0 -0.3	d2	許容傾斜角 θ	降伏點強度 pk kgf	靜負荷容量徑向 Cs kgf	
																			引張 Cs kgf	壓軸 Cs kgf
RBI 5	25	M 5x0.8	9	46	24	4	12	11	9	5	22	11	8	9	7	20	30°	290	580	1160
RBI 6	40	M 6x1.0	10	55.2	28	5	15	13	11	6	27.2	12.2	11	10	8	20	30°	380	760	1520
RBI 8	75	M 8x1.25	12.5	65	32	5	16	16	14	8	33	16	12	12	10	24	30°	600	1190	2370
RBI 10	120	M10x1.25	15	74.5	35	6.5	18	19	17	10	39.5	19.5	15	14	11	30	30°	860	1710	3420
RBI 10 B	123	M10x1.5	15	80.5	35	6.5	18	19	17	10	45.5	19.5	21	14	11	30	30°	860	1710	3420
RBI 12	185	M12x1.25	17.5	84	40	6.5	20	22	19	12	44	21	17	19	17	32	30°	1160	2330	4650
RBI 12 B	190	M12x1.75	17.5	91	40	6.5	20	22	19	12	51	21	24	19	17	32	30°	1160	2330	4650
RBI 14	275	M14x1.5	20	103	45	8	25	25	22	14	58	23.5	22	19	17	38	22°	1520	3040	6080
RBI 14 B	280	M14x2.0	20	109	45	8	25	25	22	14	64	23.5	28	19	17	38	22°	1520	3040	6080
RBI 16	360	M16x1.5	22	112	50	8	27	27	22	16	62	25.5	23	22	19	44	22°	1520	3040	6080
RBI 16 B	370	M16x2.0	22	118	50	8	27	27	22	16	68	25.5	29	22	19	44	22°	1520	3040	6080
RBI 18	535	M18x1.5	25	130.5	58	10	32	31	27	18	72.5	31	25	23	20	45	22°	1930	3850	7690
RBI 20	570	M20x1.5	27.5	133	63	10	38	34	30	20	70	29	25	29	24	50	15°	1930	3850	7690
RBI 22	755	M22x1.5	30	145	70	12	43	37	32	22	75	33	26	27	24	52	15°	2400	4750	9500