


PHS / POS

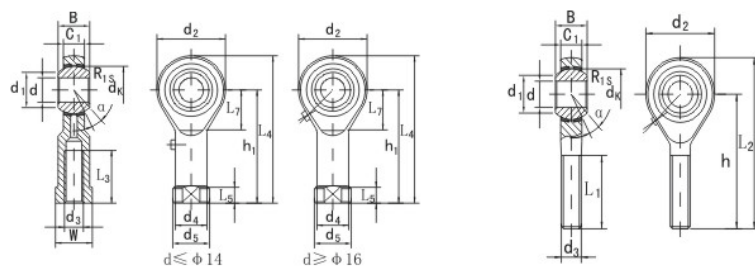

PHS

- >> The stem body has a left or right internal thread.
- >> Outer ring has a bronze liner. The surface of the stalk is galvanized and has a lubricating oil hole or oil ring.
- >> Inner ring is chrome plated.
- >> If left-hand thread, bearing model must be "L", for example: PHS8L.

POS

- >> The rod body has a left or right external thread.
- >> Outer ring has a bronze liner.
- >> Rod end surface is galvanized, with lubricating oil hole or oil ring.
- >> Inner ring is chrome plated.
- >> If left-hand thread, bearing model must be "L", for example: POS8L.

型号	尺寸mm															负荷KN		重量kg
	d	d3	B	C1	L3	W	d2	d1	h1	L4	L5	d4	d5	dk	a	动	静	
		公差:6H			min										≈	C	C0	
PHS5	5	M5x0.8	8	6	10	9	16	7.7	27	35	4	8.5	11	11.11	13	3.25	5.7	0.016
PHS6	6	M6x1.0	9	6.75	12	11	18	8.96	30	39	5	10	13	12.7	13	4.3	7.2	0.022
PHS8	8	M8x1.25	12	9	16	14	22	10.4	36	47	5	12.5	16	15.875	14	7.2	11.6	0.047
PHS10	10	M10x1.5	14	10.5	20	17	26	12.9	43	56	6.5	15	19	19.05	13	10	14.5	0.077
PHS10B	10	M10x1.25	14	10.5	20	17	26	12.9	43	56	6.5	15	19	19.05	13	10	14.5	0.077
PHS12	12	M12x1.75	16	12	22	19	30	15.4	50	65	6.5	17.5	22	22.225	13	13.4	17	0.1
PHS12B	12	M12x1.25	16	12	22	19	30	15.4	50	65	6.5	17.5	22	22.225	13	13.4	17	0.1
PHS14	14	M14x2.0	19	13.5	25	22	34	16.9	57	74	8	20	25	25.4	16	17	24	0.16
PHS14B	14	M14x1.5	19	13.5	25	22	34	16.9	57	74	8	20	25	25.4	16	17	24	0.16
PHS16	16	M16x2.0	21	15	28	22	40	19.4	64	84	8	22	27	28.575	15	21.6	28.5	0.22
PHS16B	16	M16x1.5	21	15	28	22	40	19.4	64	84	8	22	27	28.575	15	21.6	28.5	0.22
PHS18	18	M18x1.5	23	16.5	32	27	44	21.9	71	93	10	25	31	31.75	15	26	42.5	0.32
PHS20	20	M20x1.5	25	18	33	30	50	24.4	77	102	10	27.5	34	34.925	14	21.5	42.5	0.42
PHS22	22	M22x1.5	28	20	37	32	54	25.8	84	111	12	30	38	38.1	15	38	57	0.54
PHS25	25	M24x2.0	31	22	42	36	60	29.6	94	124	12	33.5	42	42.85	15	47.5	68	0.73
PHS28	28	M27x2.0	35	24	48	41	66	32.3	103	136	14	37.5	46	47.6	15	58	75	0.98
PHS30	30	M30x2.0	37	25	51	41	70	34.8	110	145	15	40	50	50.8	17	64	88	1.1
PHS30-1	30	M27x2.0	37	25	51	41	70	34.8	110	145	15	40	50	50.8	17	64	88	1.1

POS Specification

型号	尺寸mm												负荷KN		重量kg
	d	d3	B	C1	L1	d2	d2	h	L2	dk	R1s	a	动	静	
		公差:6g										≈	C	C0	
POS5	5	M5x0.8	8	6	20	7.7	16	33	41	11.11	0.3	13	3.25	5.7	0.013
POS6	6	M6x1.0	9	6.75	22	8.96	18	36	45	12.7	0.3	13	4.3	7.2	0.02
POS8	8	M8x1.25	12	9	25	10.4	22	42	53	15.875	0.3	14	7.2	11.6	0.03
POS10	10	M10x1.5	14	10.5	29	12.9	26	48	61	19.05	0.3	13	10	14.5	0.055
POS12	12	M12x1.75	16	12	33	15.4	30	54	69	22.225	0.3	13	13.4	17	0.085
POS14	14	M14x2.0	19	13.5	36	16.9	34	60	77	25.4	0.3	16	17	24	0.14
POS16	16	M16x2.0	21	15	40	19.4	40	66	86	28.575	0.3	15	21.6	28.5	0.21
POS18	18	M18x1.5	23	16.5	44	21.9	44	72	94	31.75	0.3	15	26	42.5	0.28
POS20	20	M20x1.5	25	18	47	24.4	50	78	103	34.925	0.3	14	31.5	52.5	0.38
POS22	22	M22x1.5	28	20	51	25.8	54	84	111	38.1	0.3	15	38	57	0.48
POS25	25	M24x2.0	31	22	57	29.6	60	94	124	42.85	0.3	15	47.5	68	0.64
POS28	28	M27x2.0	35	24	62	213	66	103	136	47.6	0.3	15	58	75.5	0.96
POS30	30	M30x2.0	37	25	66	34.8	70	110	145	50.8	0.3	17	64	88	1.1