


RNA69/NA69針狀系列

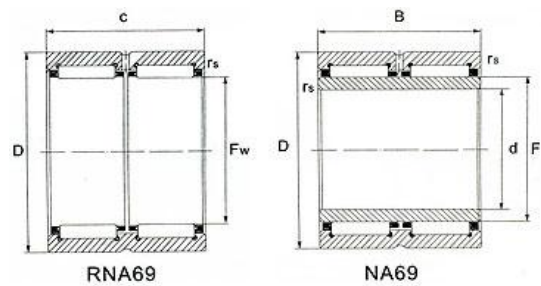

規格表

型號 Bearing Number	外型尺寸(mm)				額定負荷(n)		容許回轉數(rpm)	重量(g) Weight	
	內徑	外徑	厚度	倒角	動負荷	靜負荷	油潤滑		
	Fw	D	C	γs	Cr	C0	Oil		
RNA6901	16	24	22	0.3	16000	21600	23000	31	
RNA6902	20	28	23	0.3	17300	25500	21000	39.7	
RNA6903	22	30	23	0.3	18600	29000	20000	42.4	
RNA6904	25	37	30	0.3	36000	51000	17000	100	
RNA 69 / 22	28	39	30	0.3	37500	55000	15000	98	
RNA6905	30	42	30	0.3	39000	59000	14000	104	
RNA 69 / 28	32	45	30	0.3	40500	63000	14000	135	
RNA6906	35	47	30	0.3	43500	71000	13000	126	
RNA69 / 32	40	52	36	0.6	47000	82000	11000	162	
RNA6907	42	55	36	0.6	48000	86000	11000	193	
RNA6908	48	62	40	0.6	66000	116000	9000	256	
RNA6909	52	68	40	0.6	69000	127000	8500	338	
RNA6910	58	72	40	0.6	73000	139000	8000	310	
型號 Bearing Number	外型尺寸(mm)				額定負荷(n)		容許回轉數(rpm)	重量(g) Weight	
	內徑	內圈外徑	外徑	厚度	倒角	動負荷	靜負荷		
	Fw	F	D	C	γs	Cr	C0		
NA6901	12	16	24	22	0.3	16000	21600	23000	44.5
NA6902	15	20	28	23	0.3	17300	25500	21000	61.6
NA6903	17	22	30	23	0.3	18600	29000	20000	68.2
NA6904	20	25	37	30	0.3	36000	51000	17000	-
NA69 / 22	22	28	39	30	0.3	37500	55000	15000	130
NA6905	25	30	42	30	0.3	29000	59000	14000	138
NA 69 / 28	28	32	45	30	0.3	40500	63000	14000	170
NA6906	30	35	47	30	0.3	43500	71000	13000	-
NA 69 / 32	32	40	52	36	0.6	47000	82000	11000	272
NA6907	35	42	55	36	0.6	48000	86000	11000	301